



**ULTRAMATIC** EQUIPMENT CO.

Vibratory Finishing Equipment Technology Since 1959



## ***P6 SE Vibratory Tub Machine***

Ultramatic P Series machines started the Cell Concept in Vibratory Deburring. Still manufactured here in the USA we are the oldest family owned manufacturer of vibratory finishing equipment around.

DIRECT DRIVE SERIES features a Heavy Duty Vibratory Motor with easily adjustable weights. This unique design feature eliminates belts and pulleys and supplies 100 % power to the Tub. Requires 50% less HP resulting in huge electrical operation cost savings.



Model P6 SE Vibratory Deburring and Finishing Machine includes direct drive , variable speed and Sound Enclosure

### **STANDARD FEATURES**

UNIQUE OFFSET DRIVE FOR SUPERIOR FINISHING RESULTS  
DIRECT DRIVE WITH EASY ADJUSTABLE WEIGHTS  
HINGED SOUND COVER  
AC VARIABLE SPEED DRIVE W/ DIGITAL DISPLAY  
110 VOLT ON-OFF SWITCH & RECEPTACLE W/ CORDED PLUG  
FOAM LINED METAL CABINET  
COIL SPRING SUSPENSION WITH URETHANE MOUNTS  
PAINT: BLACK INDUSTRIAL ENAMEL / TWILIGHT GRAY

CAST POLYURETHANE LINING  
MEDIA DISCHARGE DOOR  
REMOVABLE DRAIN WITH HOSE  
ADJUSTABLE AMPLITUDE  
COMPOUND SPRAY PIPING  
RECIRCULATION PUMP AND TANK  
LUBRICATED FOR LIFE  
ONE YEAR WARRANTY



### **TYPICAL APPLICATIONS**

Deburring fabricated aluminum or steel parts  
Thread protectors  
Deburring aluminum die cast heat sinks  
Degreasing automotive starter/alternator housings  
Polishing boat propellers

Great for Powder and Ceramic Coaters  
Improve surface finish on titanium ball valves  
Deburring machined pinion gears and spline shafts  
Pre-anodize finish on long extruded aluminum parts  
Deburring of bronze water meter housings

VIDEO IS AVAILABLE ON OUR WEBSITE


STANDARD FEATURES

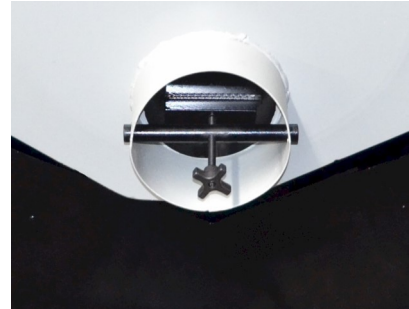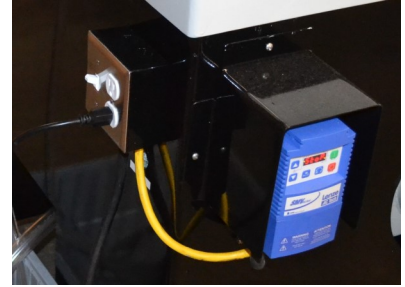

SPECIFICATIONS	
Tub Length Inside after lining	35"
Tub Width Inside after lining	18"
Total Capacity	6 Cu. Ft.
Load Capacity	1000 Lbs.
Machine Height	34"
Machine Length	43"
Machine Width	33"
Shipping Weight	950 Lbs.
Lining: 90 Durometer	3/4 "
Input Voltage	110/1/60
Drive Unit: 2474 lbs. Force	1800 Rpm
Specifications subject to change	

OPTIONAL EQUIPMENT and SUPPLIES

▪ 110 VOLT PROCESS TIMER ▪ Includes Timer , Dual Compound receptacles with corded plug.



▪ TUB DIVIDER ▪ Bolt in Divider allows different parts to be run at one time and prevents parts from contact with each other



▪ ST15FS Filtration System ▪ Includes Tank with Filtration Bags & Pump.



▪ Media and Compound Starter Kit for Steel Parts ▪ Includes load of media & 5 Gallon of Compound



▪ Media and Compound Starter Kit for Aluminum Parts ▪ Includes load of media & 5 Gallon of Compound



▪ Automatic Premixing Compound System ▪



SEE OUR P3, P6 AND P10 MODELS

UM Abrasives Inc.  
831 Trent St  
Kennedale, TX. 76060  
(817) 572-1344  
sales@umabrasives.com